


## SIZE

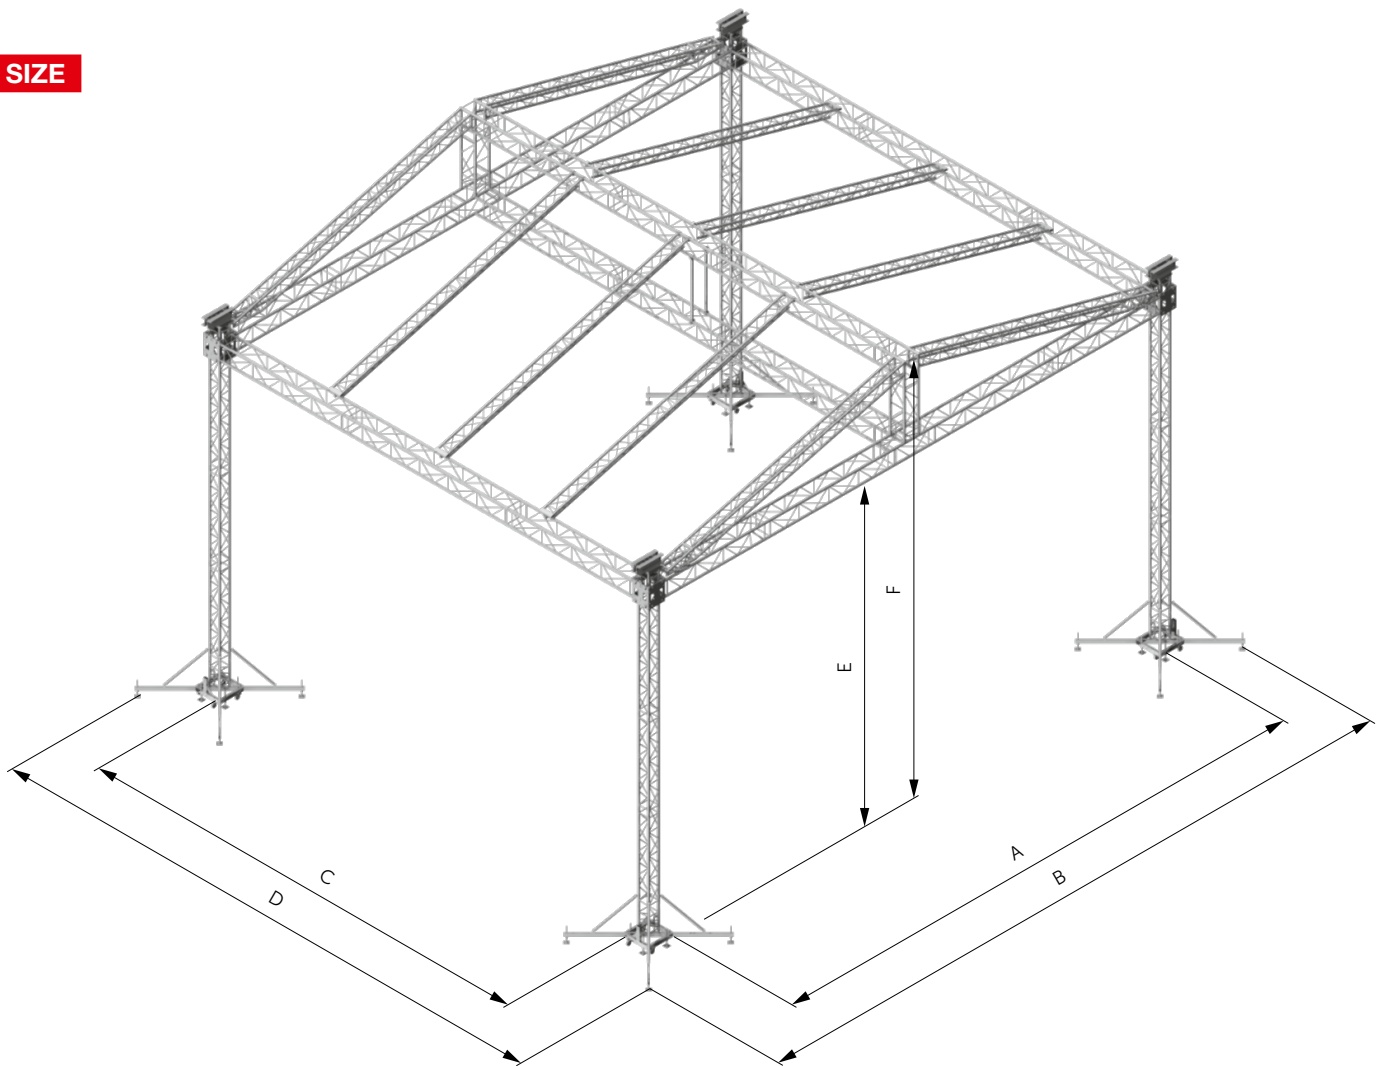

### USED CONSTRUCTION SYSTEMS

Mast section	TT-34
Support truss	FT-44
Outside rafter	FT-34
Inside rafter	FT-33

### SPECIFICATIONS

Max.dimension	14,5x12,5m (47,6x41,0ft)
Max.stage size	12x10m (39,4x32,8ft)
Max.clearance	7,0m (23,9ft)
Max.height	9,1m (29,8ft)
Max.load bearing capacity	3500kg (7716lb)
Total weight of construction	2000kg (4409lb)



### STAGE MEASUREMENTS

	Inside width	Overall width	Inside depth	Overall depth	Clearance	Height
	A	B	C	D	E	F
8x6 m (26,25x19,69ft)	8030mm (26,35ft)	10500mm (34,45ft)	6030mm (19,78ft)	8500mm (27,89ft)	7000mm (22,97ft)	8567mm (28,11ft)
10x8 m (32,81x26,25ft)	10030mm (32,91ft)	12500mm (41,01ft)	8030mm (26,35ft)	10500mm (34,45ft)	7000mm (22,97ft)	8830mm (28,97ft)
12x10 m (39,37x32,81ft)	12030mm (39,47ft)	14500mm (47,27ft)	10030mm (32,91ft)	12500mm (41,01ft)	7000mm (22,97ft)	9086mm (29,81ft)